



## WSS4 1FXS 1FXO Realtone Gateway

A linha Realtone é bastante conhecida pela flexibilidade e alta qualidade. Neste modelo de 1FXS e 1FXO é possível trabalhar com essas duas opções ao mesmo tempo. E pensando na praticidade que o equipamento oferece a equipe da Lojamundi tem testado algumas funcionalidades e desenvolvido documentado esses testes para que nossos clientes possam aplicar em suas estruturas. Nosso objetivo é oferecer o melhor suporte e soluções, você pode adquirir esse equipamento entrando no site <http://www.lojamundi.com.br>.

Neste tutorial iremos realizar uma configuração simples para o seu servidor. O primeiro passo é o acesso, não iremos abordar neste tutorial como acessar o equipamento, mas se preferir esse passo a passo pode ser encontrado no link a seguir:

<http://www.lojamundi.com.br/blog/configuracao-realtone-wss60-8s-8.html>

Por padrão Gateway possui o seguinte IP 192.168.2.218, para alterar este IP acesse a aba NETWORK e aplique o IP desejado.

Após ter acessado o equipamento e aplicado o endereço IP, vamos configurá-lo com o servidor Asterisk. Acesse a aba **BASIC>SIP**;

Welcome admin Login time: 1970-01-02 07:56:47 Version info

Basic Network Routing Phone/Line Advanced Status Logs Tools

System SIP IAX2 EoIP Logout

Signaling port	5060	1-9999, default 5060
Auto SIP port selection	Off	1-10. Increase the SIP port value incrementally
Registration server	40.40.40.209	
Proxy server	40.40.40.209	e.g. 168.33.134.50:5060 or www.sip.com:5060
Backup proxy server		e.g. 168.33.134.53:5060
User agent domain name		e.g. www.gatewaysip.com
Authentication mode	Register by line	
Registration expire	600	15-86400 (s), default 600

Submit


**Lojamundi – CNPJ: 17.869.444/0001-60**

Av. Paranoá Qd. 09 conj. 01 lote 01 sala 304, Paranoá DF CEP: 71.571-012

[www.lojamundi.com.br](http://www.lojamundi.com.br)

Feito isto, vamos configurar a porta FXO que receberá a linha. Vá até a aba

**PHONE/LINE>LINE 1;**

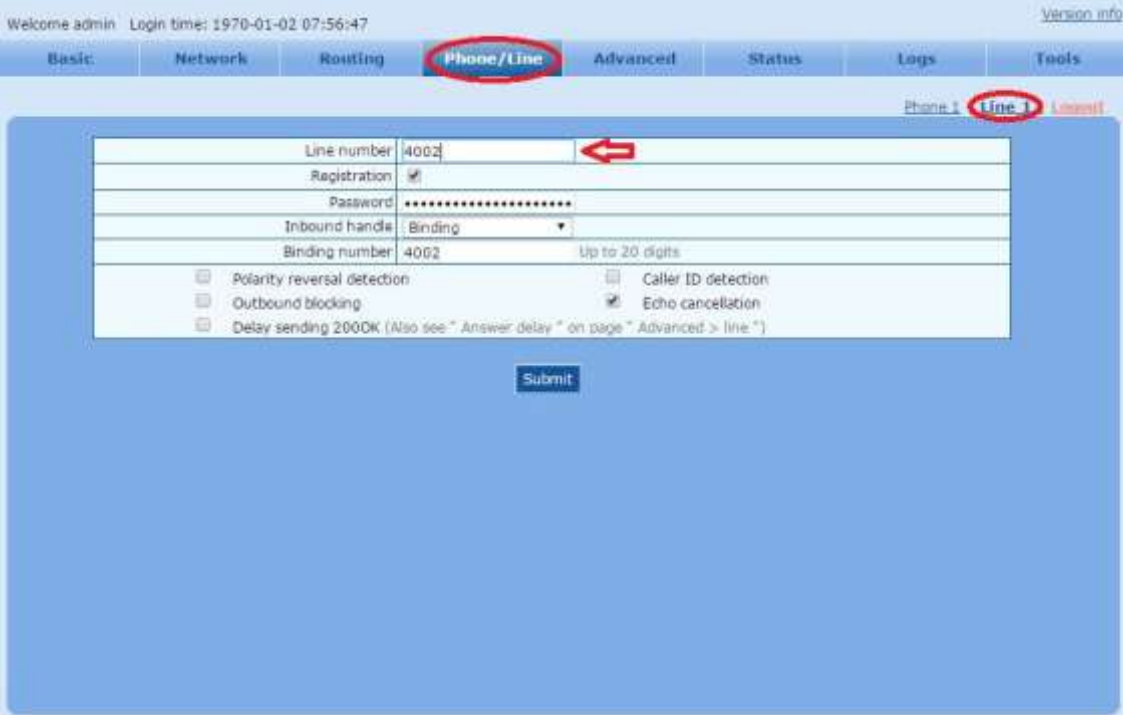

Welcome admin Login time: 1970-01-02 07:56:47 [Version info](#)

Basic Network Routing **Phone/Line** Advanced Status Logs Tools

Phone 1 **Line 1** Logout

Line number	4002
Registration	<input checked="" type="checkbox"/>
Password	*****
Inbound handle	Binding
Binding number	4002 Up to 20 digits
<input type="checkbox"/> Polarity reversal detection	<input type="checkbox"/> Caller ID detection
<input type="checkbox"/> Outbound blocking	<input checked="" type="checkbox"/> Echo cancellation
<input type="checkbox"/> Delay sending 2000K (Also see "Answer delay" on page "Advanced > line")	

Após aplicar as configurações, podemos verificar o status e confirmar, se a porta foi configurada, Clique em **STATUS**;



Welcome admin Login time: 1970-01-02 09:30:05 [Version info](#)

Basic Network Routing Phone/Line Advanced **Status** Logs Tools

[Call status](#) | [Call history on phone](#) | [Call history on line](#) | [SIP message count](#) [Logout](#)

Connected: 0 Idle: 2 Call in progress: 0 Other: 0 [Clear](#) [Refresh](#)

Port id	Phone No. (This End)	Registration	Line	Call	Phone No. (Other End)	Duration	Operation	In	Out	Answered
Phone-1	8000	Fail	On-hook	Idle			-	0	0	
Line-1	4002	Registered	Disconnect	Idle			-	B	0	

Pronto!

Agora sua porta já está habilitada a receber sua linha.

**Lojamundi – CNPJ: 17.869.444/0001-60**

Av. Paranoá Qd. 09 conj. 01 lote 01 sala 304, Paranoá DF CEP: 71.571-012

[www.lojamundi.com.br](http://www.lojamundi.com.br)